



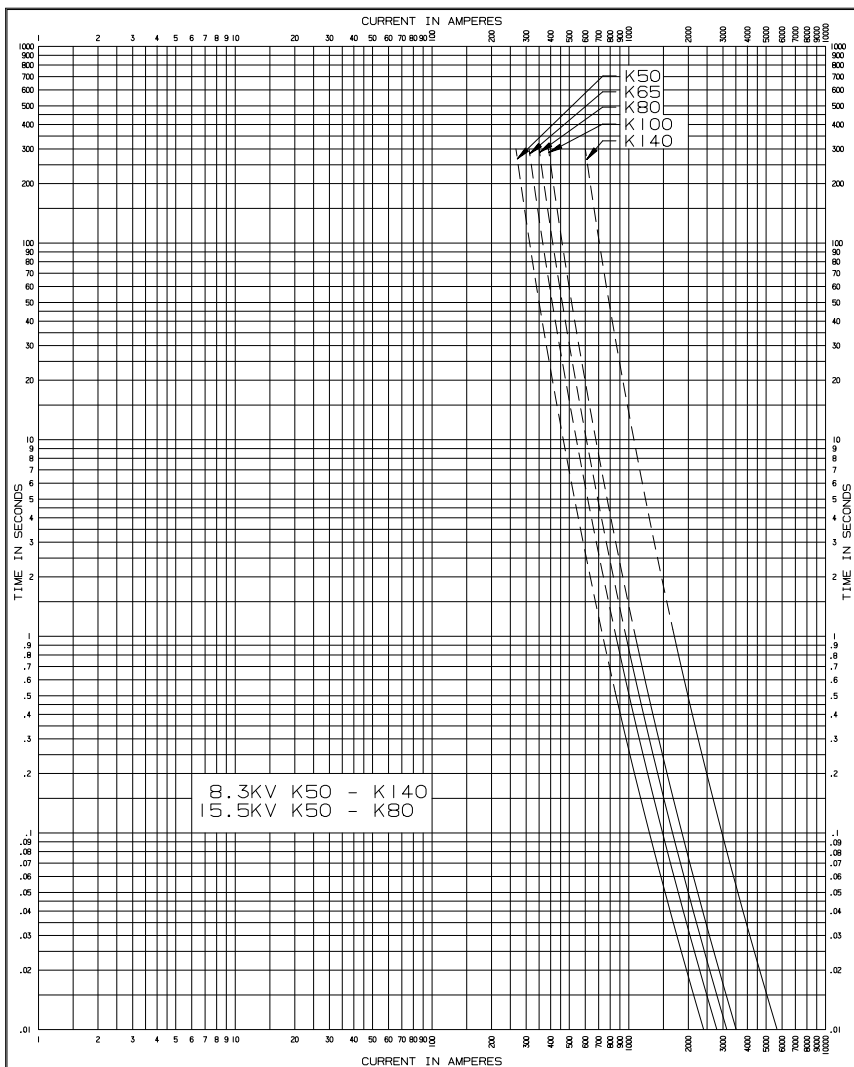

COOPER Power Systems COMPONENTS AND PROTECTIVE EQUIPMENT			TIME-CURRENT CHARACTERISTIC CURVES	
			MINIMUM MELT 8.3KV AND 15.5KV K-LIMITER BACK-UP FUSE	
DRAWN BY	ALJ	CHK'D	Tests made at LOW Volts ac at HIGH pf at 25°C with no initial load	
DATE	02/22/00	DATE	Standards used as basis for data: ANSI C37.47-1981 (R1992)	
REPLACES	/	REV 01	MINIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE PLUS	
DWG NO.	CT	TCC701	THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.	
	M	00		

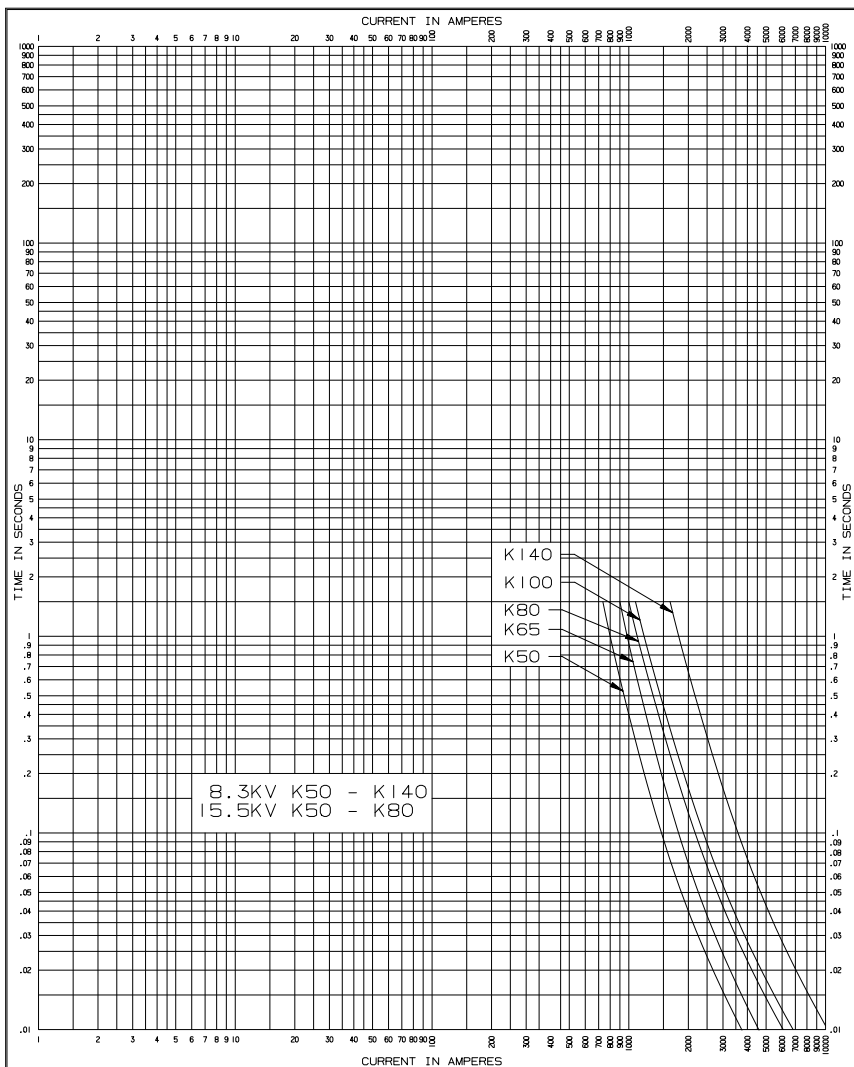

COOPER Power Systems COMPONENTS AND PROTECTIVE EQUIPMENT			TIME-CURRENT CHARACTERISTIC CURVES
DRAWN BY ALJ			MAXIMUM CLEAR 8.3KV AND 15.5KV K-LIMITER BACK-UP FUSE
DATE 02/22/00			Tests made at RATED Volts ac at LOW pf at 25°C with no initial load
REPLACES / REV 01 REQ. NO. 19616			Standards used as basis for data: ANSI C37.47-1981 (R1992)
DWG NO. CT TCC701 C 00			MAXIMUM TEST POINTS PLOTTED SO VARIATIONS SHOULD BE MINUS
			THIS DRAWING WAS PRODUCED ON A CAD SYSTEM, ANY MANUAL REVISION WILL VOID IT.