


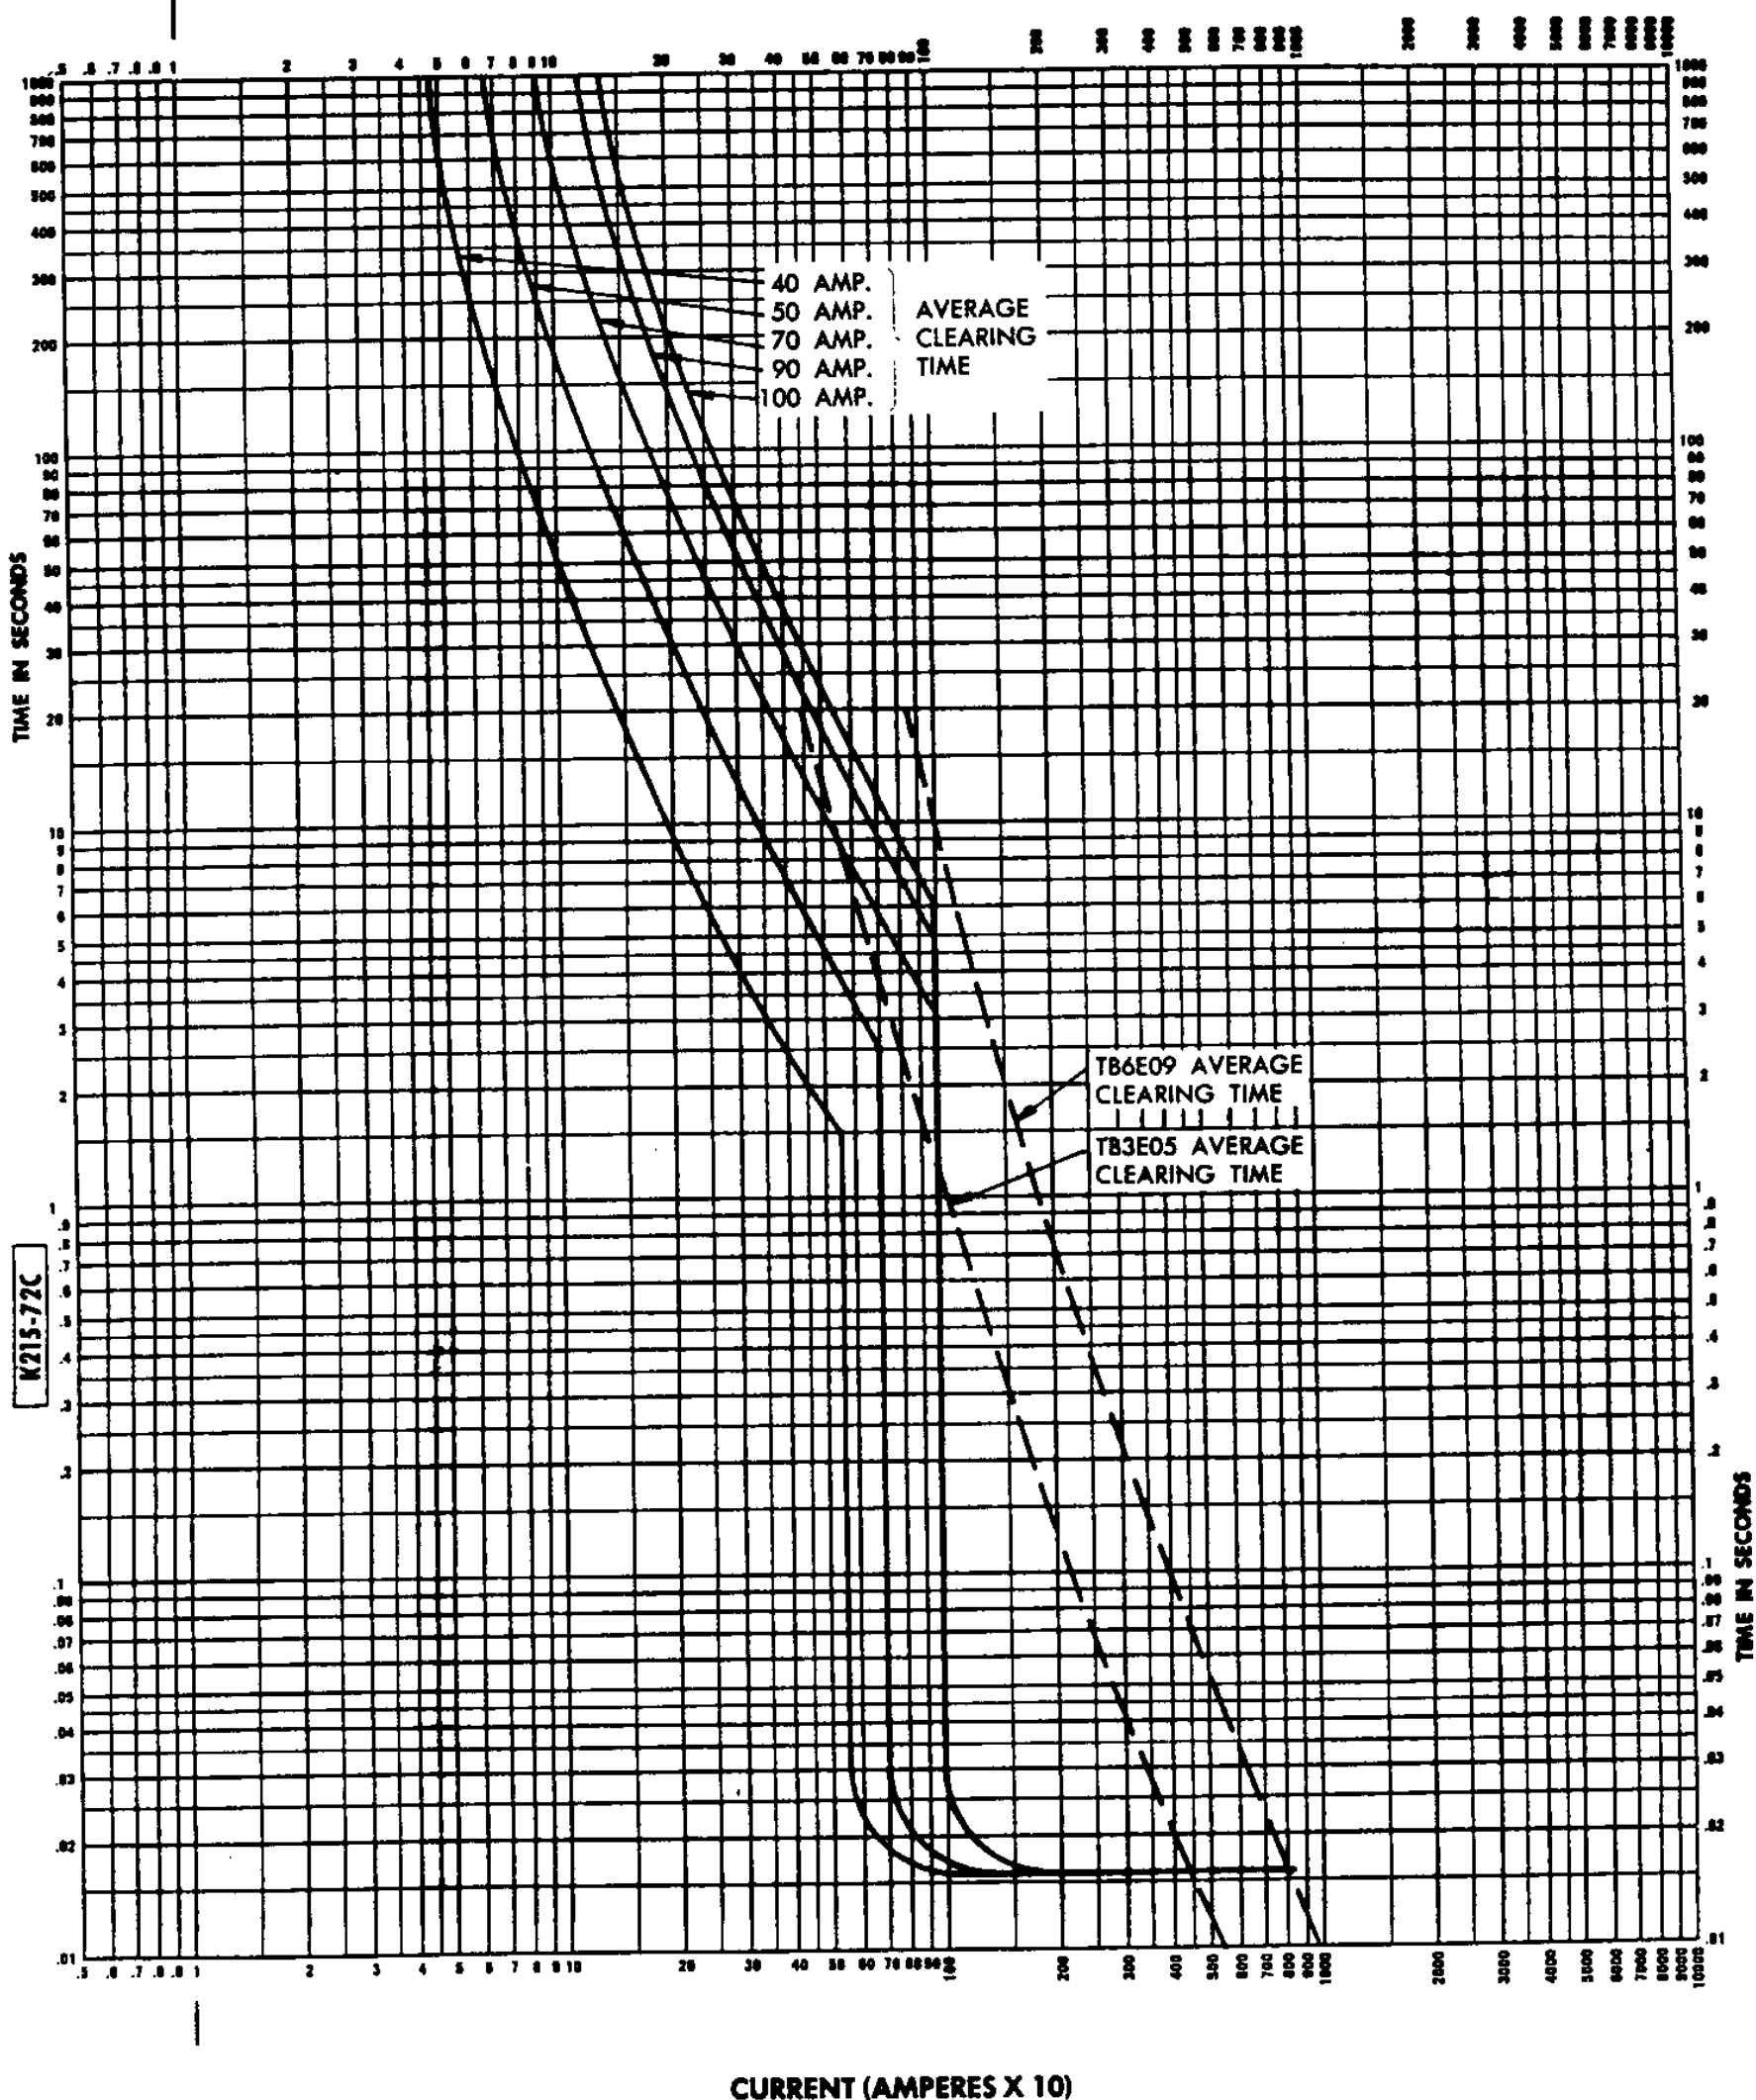

GENERAL ELECTRIC	INTEGRALLY FUSED MOLDED CASE CIRCUIT BREAKER	K215-72C
Current Ratings 40, 50, 70, 90 and 100 Amperes Voltage Ratings 600 Volts A-c (250 Volts D-c) Frequency Ratings D-c or 60 Cycles	TRI-BREAK LINE TYPE TB1 (40-100 AMPERES) Thermal trip, Magnetic trip & Current Limiter Characteristics Time vs RMS Current	Adjustments Long time delay thermal trip, not adjustable. Instantaneous magnetic trip, not adjustable.