


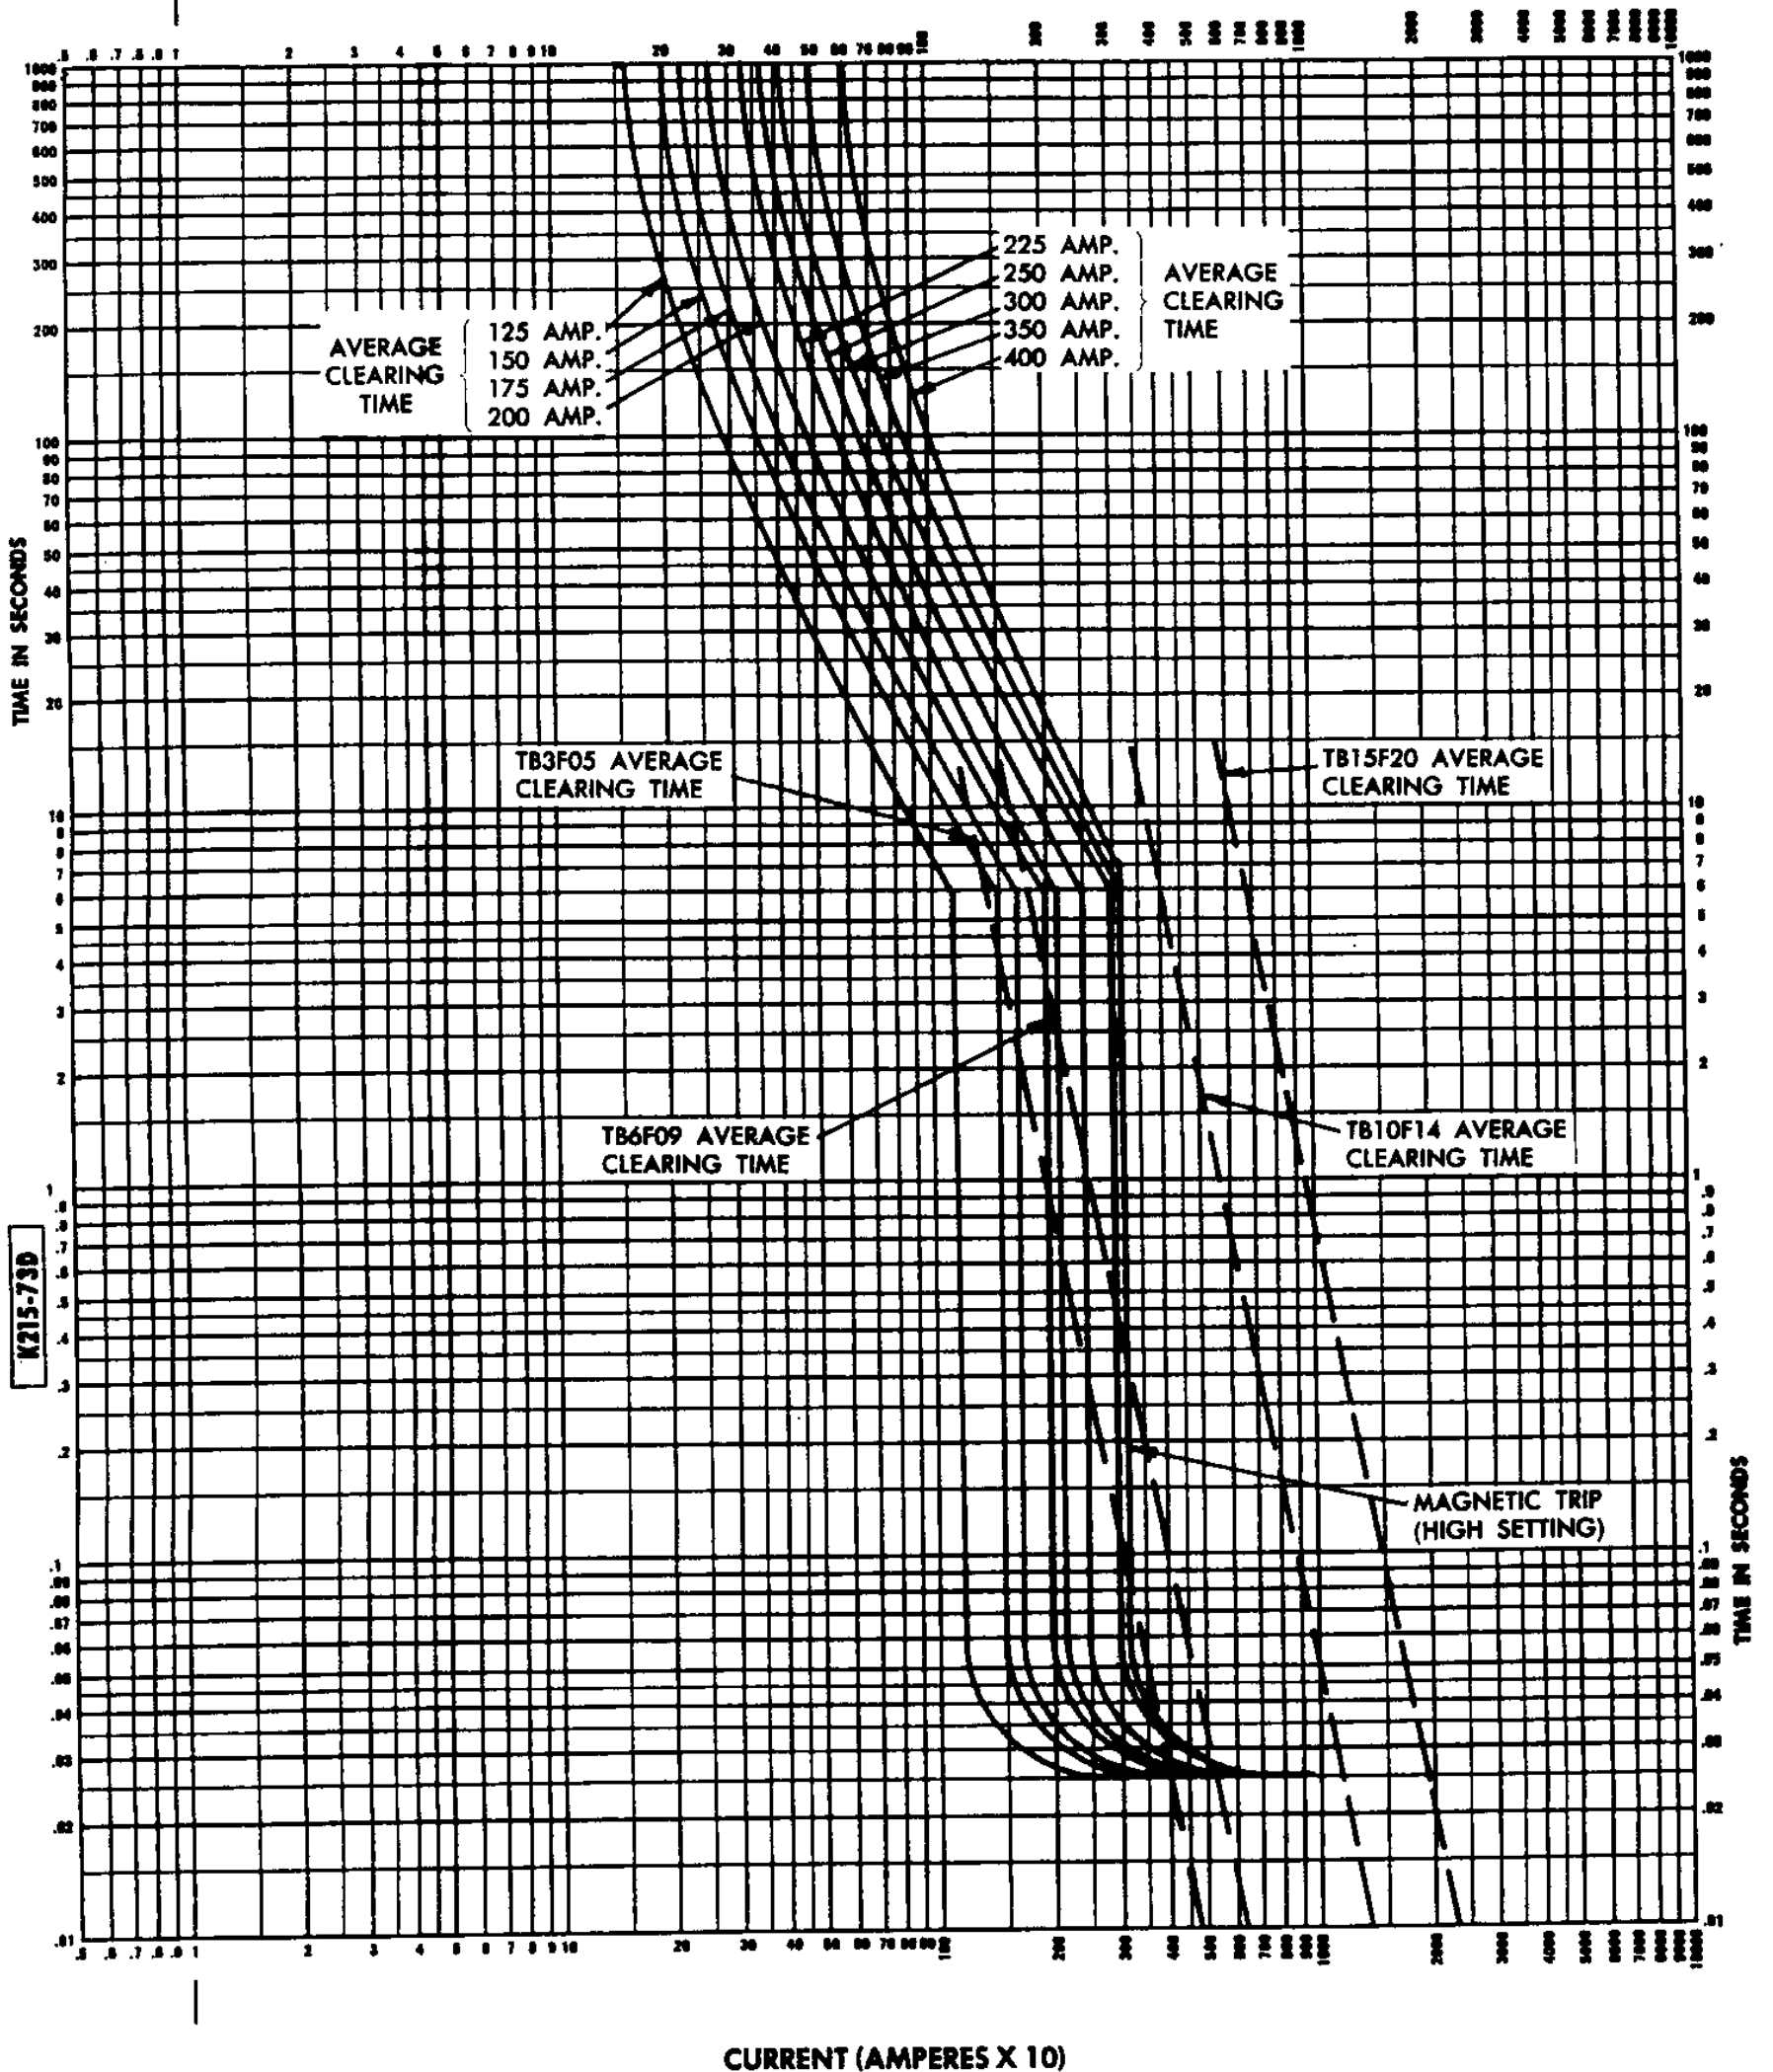

GENERAL ELECTRIC Current Ratings 125, 150, 175, 200, 225, 250, 300, 350 & 400 Amperes Voltage Ratings 600 Volts A-c; 250 Volts D-c Frequency Ratings D-c or 60 Cycles	INTEGRALLY FUSED MOLDED CASE CIRCUIT BREAKER TRI-BREAK LINE TYPE TB4 (125-400 AMPERES) Thermal trip, Magnetic trip & Current Limiter Characteristics Time vs RMS Current	K215-73D Adjustments Long time delay thermal trip, not adjustable. Instantaneous magnetic trip, continuously adjustable, set on HI.
---	---	---

REV. 11-21-68

CIRCUIT PROTECTIVE DEVICES DEPARTMENT, PLAINVILLE, CONNECTICUT