


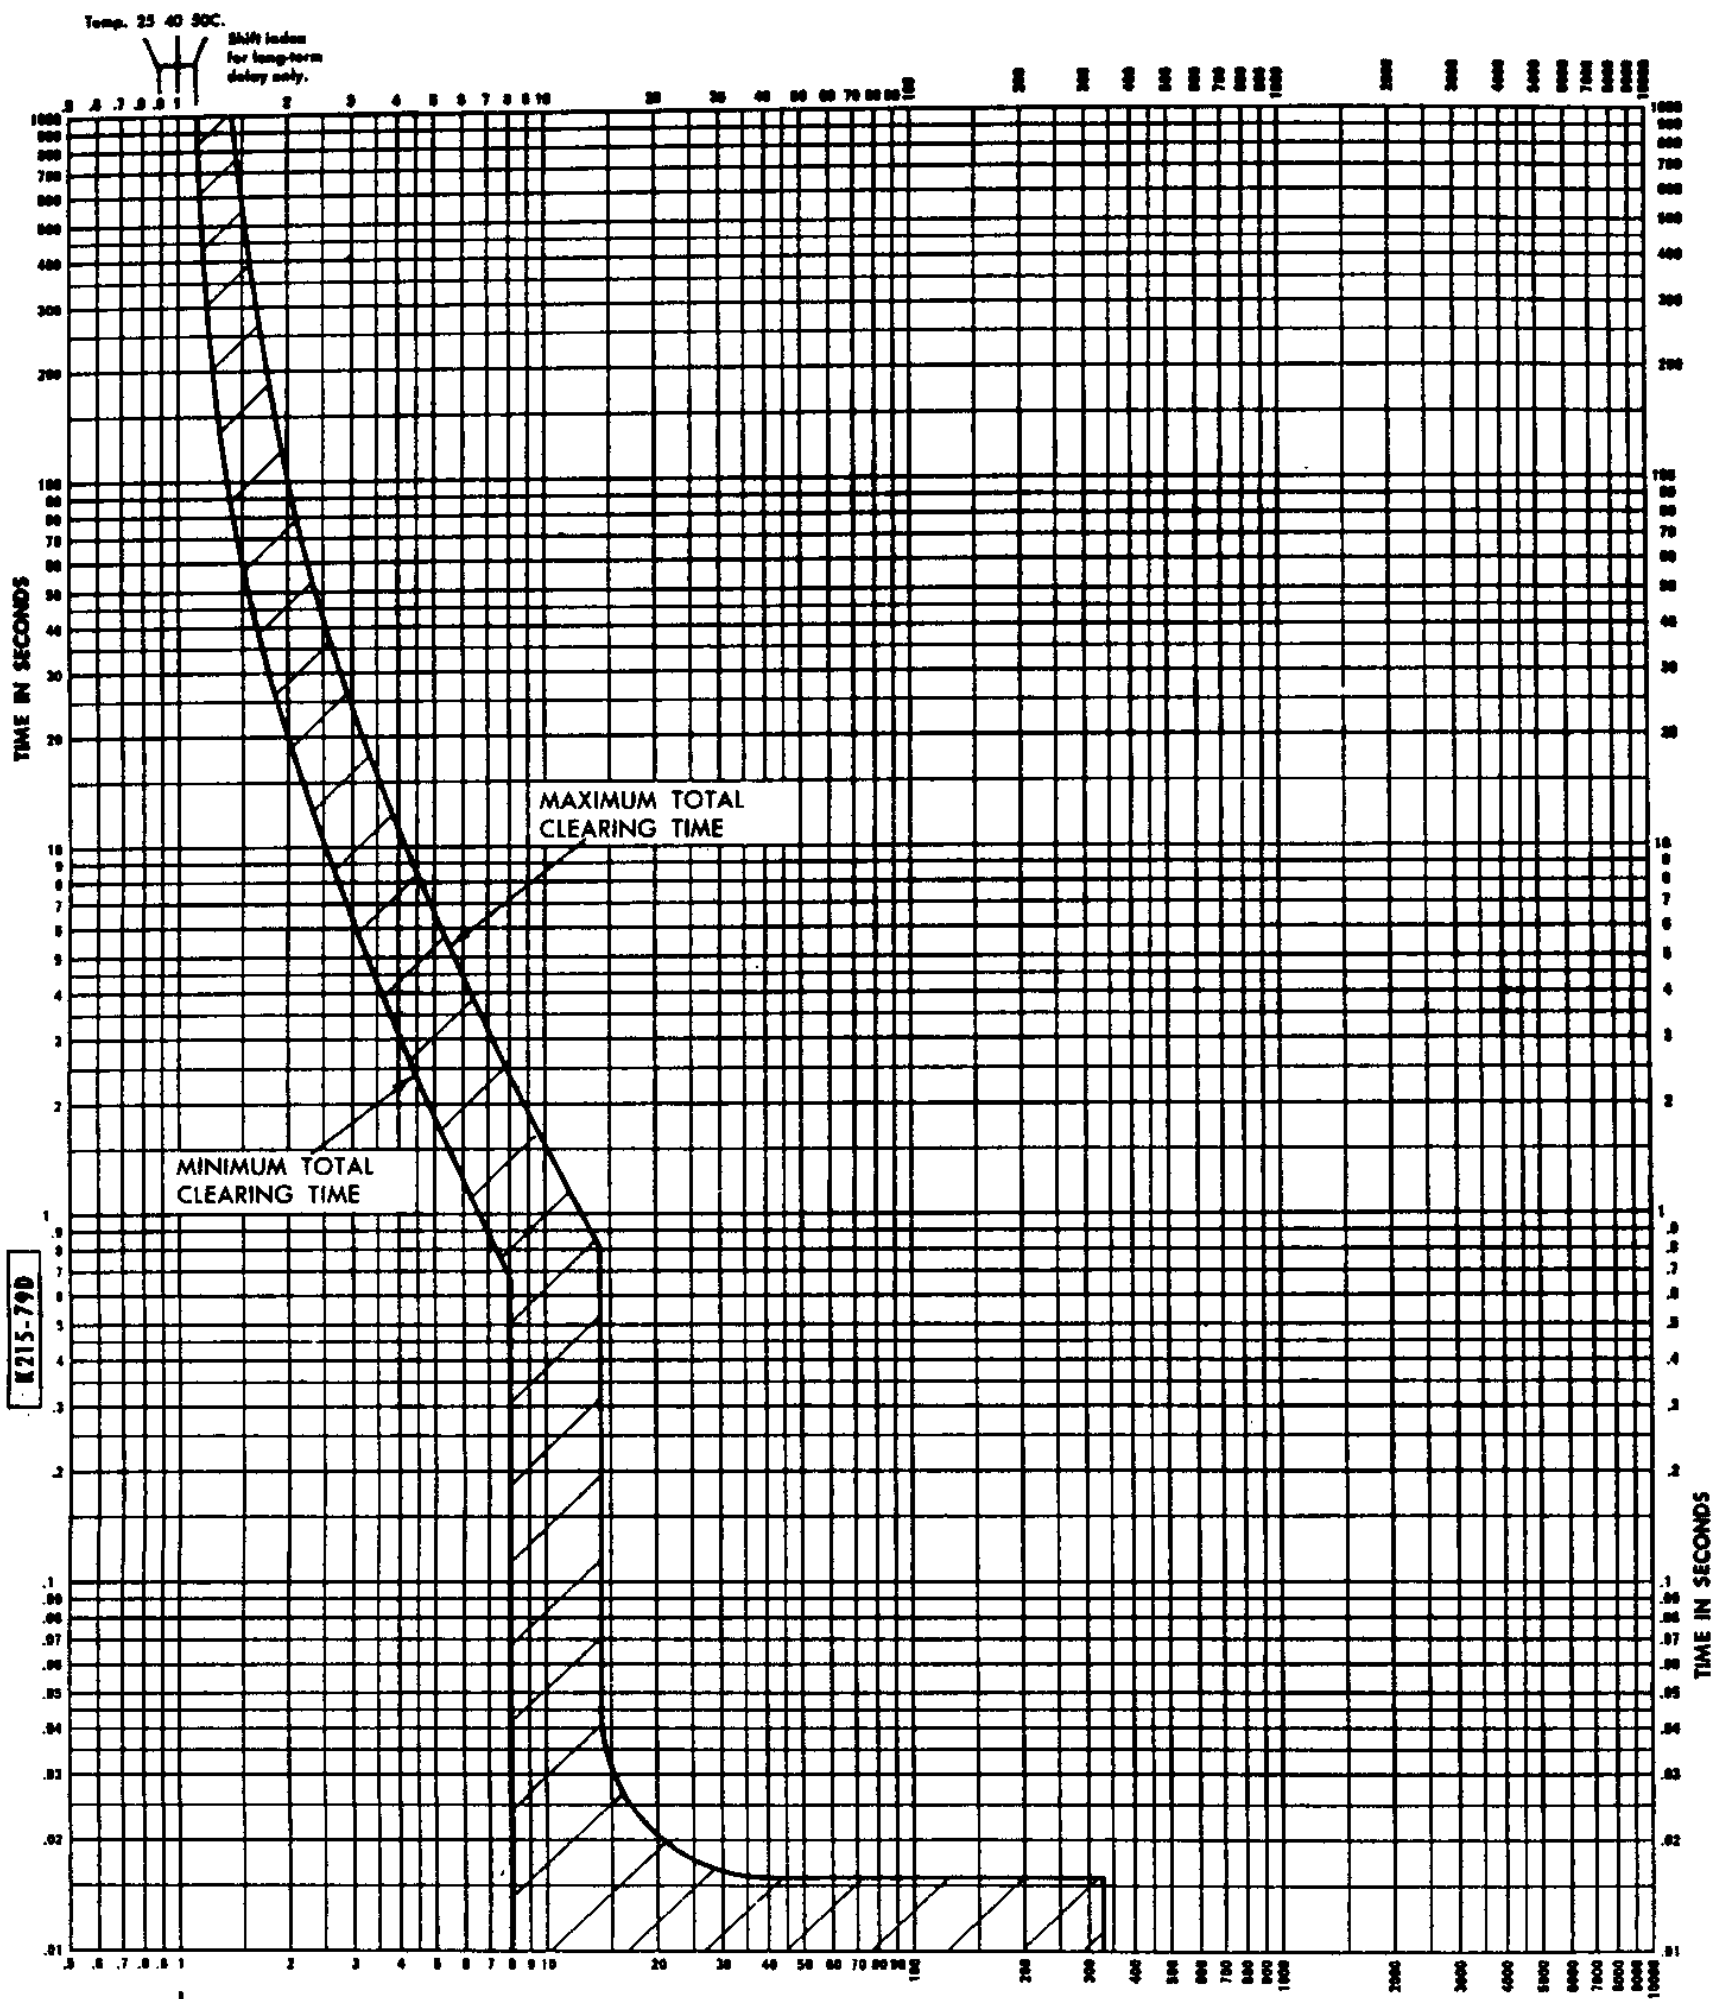

MULTIPLES OF CURRENT RATING

GENERAL  ELECTRIC

Current Ratings
15, 20, 25, 30, 35, 40, 45 and 50 Amperes

Voltage Ratings
120/240 Volts, A-c

Frequency Ratings
60 Hertz

MOLDED CASE CIRCUIT BREAKERS

"Q" LINE

Types TQP and THQP (1 and 2 Pole)

**Long-time Delay and Instantaneous
Time-current Curves**

Curves show circuit breaker in open air, 40°C ambient, wired with conductors of corresponding rating, no prior load. For all other ambients use rating shift index at top of sheet.

K215-79D

Adjustments

Long-time delay thermal trip, not adjustable.
Instantaneous magnetic trip, not adjustable.

REV. 3-22-72

GENERAL ELECTRIC CO., CIRCUIT PROTECTIVE DEVICES PRODUCT DEPT., PLAINVILLE, CONN.