


CURRENT IN MULTIPLES OF RATING PLUG AMPERES



CURRENT IN MULTIPLES OF RATING PLUG AMPERES

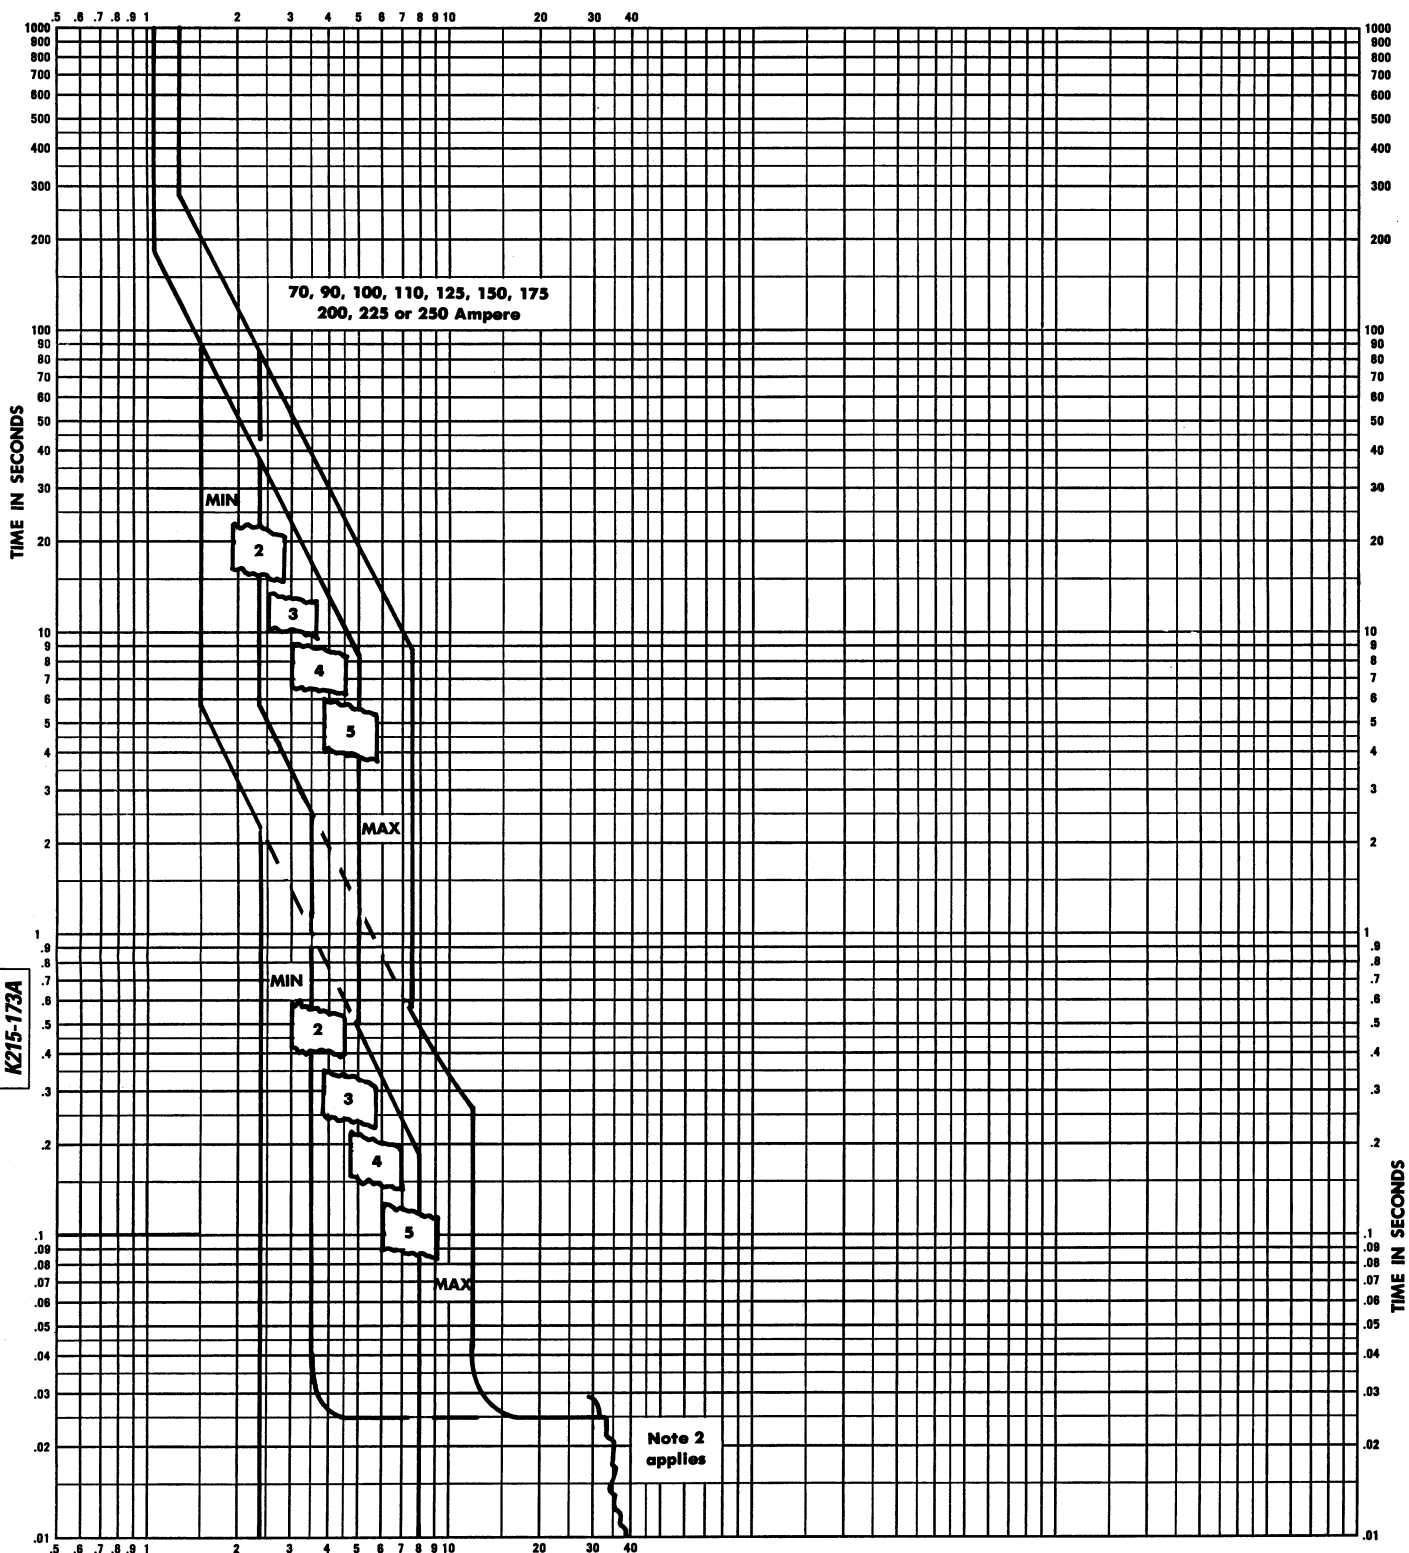

**GE Electrical
Distribution & Control**

Current Ratings

Frame Amperes	Rating Plug Amperes
250	70/90/100/110/125/150/175/200/225/250

Voltage Ratings

2-pole—480 Vac max.
3-pole—600 Vac max.

**Molded Case Circuit Breakers
Type SF with Spectra RMS™
Solid-state Trip**

**Long-time Delay and Instantaneous
with Tracking Short-time Delay
Time-current Curves**

Curves apply at 50 to 400 Hertz and from -20°C to
70°C breaker ambient.

K215-173A

Adjustments

Long-time delay; not adjustable.

Instantaneous pick-up settings in multiples of rating
plug rating: MIN, 2, 3, 4, 5, 6, MAX

Note 1: Operation above 60 Hertz and 50°C play require
thermal and interrupting derating of the circuit breaker.
Refer to Selection and Application manual.

Note 2: Current limiting range, total clear prior to
0.01second. For additional data refer to I_p and I_t curves.

GE Electrical Distribution & Control 41 Woodford Ave. Plainville, CT 06062